

# primus

## High Spin Washer Extractors M 90, M 140, M 180

### FEATURES

- Freestanding, high spin
- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Standard Full control (FC) microprocessor (multilingual, freely programmable)
- Oversized frame, bearings and drum
- Large door opening (76 cm) for easy loading and unloading.
- Large drain valve
- Easy access to all parts
- Frequency controlled motor
- Power Wash® perforated lifting ribs: more mechanical action, lower water consumption
- Standard drum with 2 pockets (Pullmann)

### OPTIONS


- Liquid soap pumps
- Built-in water recovery system
- LPMS networking and traceability software
- Y - pocket drum (3 pockets)
- Patented soap dispenser with 5 removable compartments



**POWERWASH®**

TYPE		M 90	M 140	M 180
<b>CAPACITY</b>				
Drum volume	l	900	1400	1800
Capacity 1:10	kg lbs	90 198	140 308	180 396
Drum dimensions	mm	Ø1000x1150	Ø1200x1250	Ø1300x1400
<b>POCKETS</b>				
		Standard 2 Optional 3	Standard 2 Optional 3	Standard 2 Optional 3
<b>MOTOR</b>				
Frequency controlled		standard	standard	standard
<b>DRUM SPEED</b>				
Wash speed	rpm	32	32	32
Spin speed	rpm	800	720	695
G-factor		360	350	350
<b>PROGRAMMER</b>				
FC-microprocessor		standard	standard	standard
<b>CABINET</b>				
Stainless steel AISI 304		standard	standard	standard
<b>DRUM</b>				
Stainless steel AISI 304		standard	standard	standard
<b>HEATING</b>				
Electrical additional heating	kW	54-72	112	-
Steam heating	bar	6-8	6-8	6-8
<b>CONNECTION</b>				
Electrical		380-415V 3AC 50/60Hz 220-240V 3AC 50/60Hz 208-240V 3AC 50/60Hz 440-480V 3AC 50/60Hz 200V 3AC 50/60Hz		
Water inlet	inch	3x1,5 + 1x3/4"	3x1,5 + 1x3/4"	3x1,5 + 1x1"
Steam inlet	inch	1"	1"	1,5"
Compressed air inlet	inch	1/4"	1/4"	1/4"
Drain	mm	150	150	200
<b>DIMENSIONS</b>				
HxWxD	mm	1720x2200x1500	1990x2330x1700	2090x2510x1800
<b>TRANSPORT DATA</b>				
Gross weight - case packaging	kg	3400	4750	5500
Net weight	kg	3200	4500	5200
Volume (packed)	m <sup>3</sup>	7,1	10	11,9
Case packaging HxWxD	mm	1978x2350x1736	2248x2480x1936	2260x2660x1950

- |                           |   |   |
|---------------------------|---|---|
| 1. Hard cold water inlet  | 8. Recycling drainage valve                                 | 14. Central stop                            |
| 2. Soft cold water inlet  | 9. Venting of the machine                                   | 15. Button of door unlocking                |
| 3. Hot water inlet        | 10. Door of loading   | 16. Button of drum positioning              |
| 4. Steam inlet            | 11. Programmer  | 17. Button of door locking                  |
| 5. Supply of pressure air | 12. Change-over switch                                      | 18. Main switch                             |
| 6. Power supply           | 13. Signal of machine running<br>(+ operating air pressure) | 19. Soap hoppers                            |
| 7. Main drainage valve    |   | 20. Soft cold water inlet into soap hoppers |

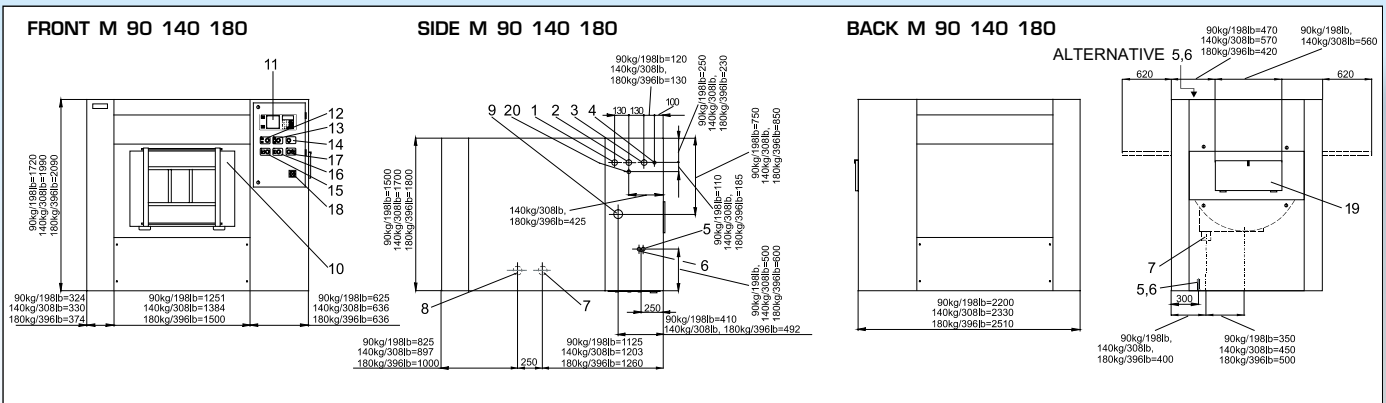

The company Primus bvba preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

primus

Quality without  
compromise

**Bvba**  
Certified Company  
ISO 9001

**CE**