

primus

Professional Washer Extractors C 6, C 8

FEATURES

- Large capacity - 6/8 kg
- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Easy to use timer, economy programmes, mop programmes
- Short washing cycle
- Large drain valve (50 mm)
- Soap hopper on the top
- Frequency controlled motor
- Power Wash® perforated lifting ribs: more mechanical action, lower water consumption

OPTIONS


- Coin operated timer
- Drain pump
- Liquid soap pumps



POWERWASH®

liqui-mix®

TYPE		C 6	C 8
CAPACITY	kg	6	8
DIMENSIONS DRUM	mm	530x270	530x330
DRUM VOLUME	l	60	73
MOTOR			
Frequency controlled		standard	standard
EXTRACTION SPEED	rpm	1150	1100
G-FACTOR		390	360
ELECTRICAL CONNECTION		220-240V/AC/50-60Hz 220-240V/3AC/50-60Hz 380-400V/3AC/50-60Hz 440V/3AC/50-60Hz	
ELECTRICAL HEATING	kW	Standard 6kW	
		Optional 3 or 9kW	
WATER CONNECTION			
Warm water max. 90 °C		3/4"	3/4"
Cold water connection		3/4"	3/4"
DRAIN			
Drain valve		standard	
Pump		available	
DIMENSIONS			
HxWxD	mm	1070x685x645	1070x685x685
TRANSPORT DATA			
Gross weight			
Cardboard packing	kg	185	185
Net weight	kg	170	170
Volume (packed)			
Cardboard packing	m³	0,6	0,66
Cardboard packing			
HxWxD	mm	1190x730x700	1190x730x760

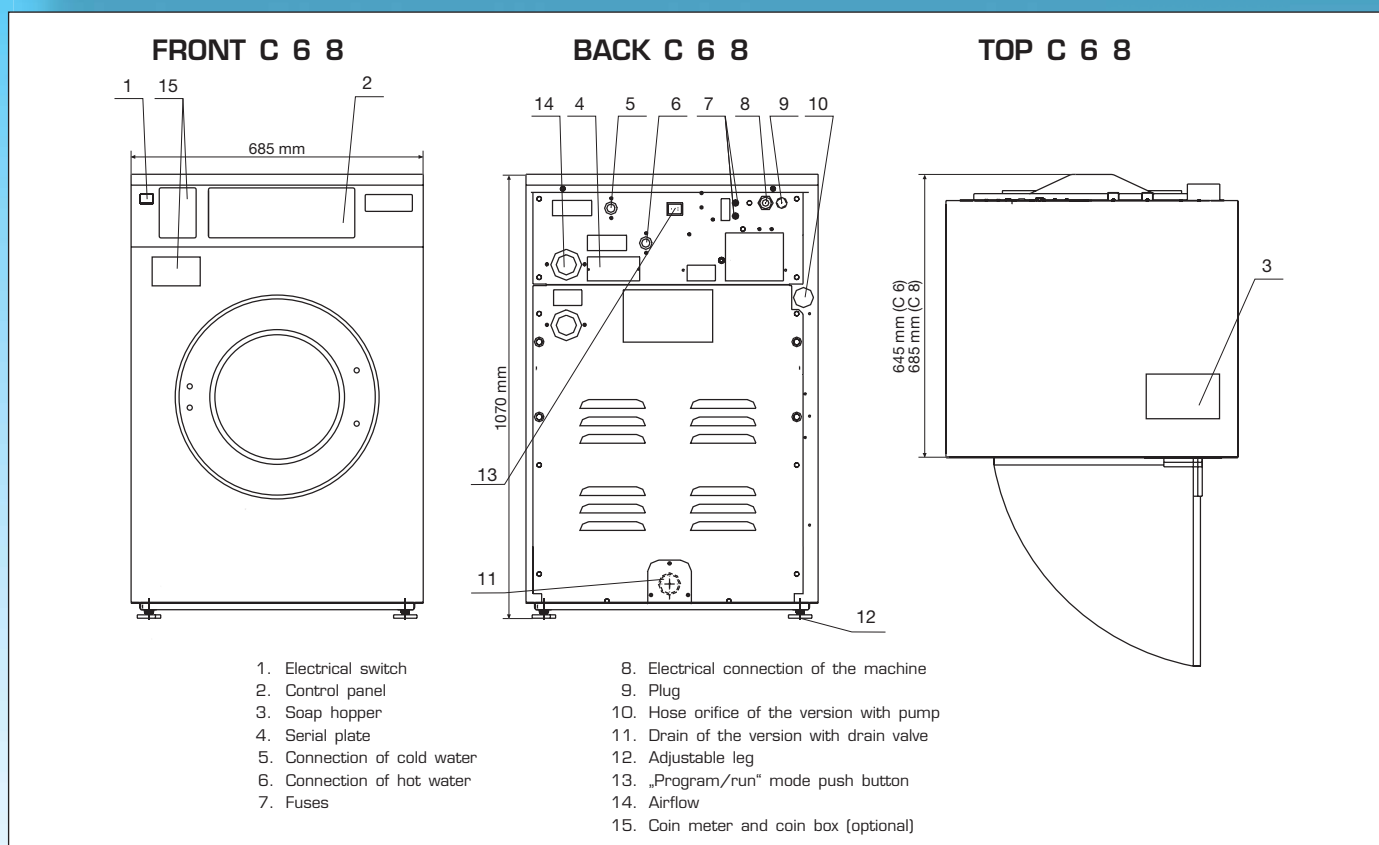

The company Primus bvba preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

primus

Quality **without**
compromise

