primus

laundry equipment

FEATURES

- Freestanding, high spin
- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Standard Easy to use (EC) microprocessor
- Extra large door opening (42 cm) for easy loading and unloading
- Large drain valve (75 mm)
- Easy access to all parts
- Patented soap hopper and drain valve (Liqui-Mix® system)
- Standard liquid soap connections
- Frequency controlled motor
- Power Wash® perforated lifting ribs: more mechanical action, lower water consumption
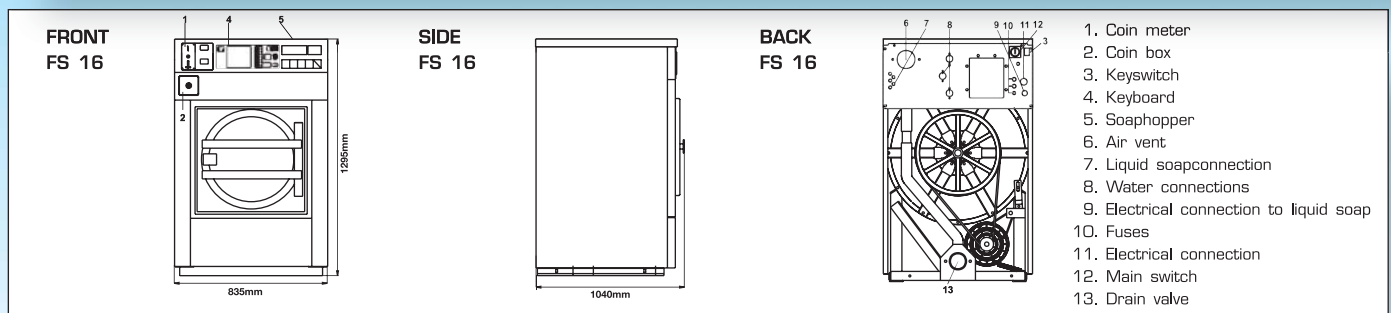
OPTIONS

- Full control (FC) microprocessor
- Liquid soap pumps
- Coin operated timer
- Anti-vandalism fascia panel
- Soft wash version (wet cleaning)
- Water recovery kit
- LPMS networking software

Liqui-mix®

POWERWASH®

TYPE		FS 16
CAPACITY		
Drum volume	l	166
Capacity	kg	16,5
Drum dimensions	mm	⌀650x500
DRUM SPEED		
Wash speed	rpm	45
Distribution speed	rpm	100
Spin speed	rpm	980
G-factor		350
PROGRAMMER		
Coin meter (or tokens)		+
Coin counter		+
EC microprocessor		standard
FC microprocessor		+
Vandal Resistant Microprocessor		+
CABINET		
Stainless steel AISI 304		standard
Coloured panels		+
CONNECTION		Freestanding (4xM10)
HEATING		
100% hot water	°C	90
	°F	194
100% electrical 220-240V	kW	9-12-18
380-400V	kW	9-12-18
Hot water and electrical		
Additional heating 220-240V	kW	9-12-18
380-400V	kW	9-12-18
Steam additional heating	bar	1-3
Steam high pressure	bar	3-8
CONNECTION		
Electrical 220-240V		AC/50-60Hz
220-240V		3AC/50-60Hz
380-415V		3AC+N/50-60Hz
380-480V		3AC/50-60Hz
Water inlet	inch	G 3/4"
Steam inlet	inch	G 1/2"
DIMENSIONS		
HxWxD	mm	1295x835x1040
TRANSPORT DATA		
Gross weight		
Cardboard packing	kg	485
Net weightt	kg	465
Volume (packed)		
Cardboard packing	m³	1,6
Cardboard packing HxWxD	mm	1510x930x1140
+ = Available		
Standard = Standard execution		

FRONT FS 16 — 835mm, 1295mm
SIDE FS 16 — 1040mm
BACK FS 16

1. Coin meter
2. Coin box
3. Keyswitch
4. Keyboard
5. Soaphopper
6. Air vent
7. Liquid soapconnection
8. Water connections
9. Electrical connection to liquid soap
10. Fuses
11. Electrical connection
12. Main switch
13. Drain valve

The company Primus bvba preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

primus

Quality **without** compromise