

primus

High Spin Industrial Washer Extractors FS 6, FS 7, FS 10



FEATURES

- Freestanding, high spin
- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Standard Easy to use (EC) microprocessor
- Large drain valve (75 mm)
- Easy access to all parts
- Patented soap hopper and drain valve (Liqui-Mix® system)
- Standard liquid soap connections
- Compact width: 660 mm, ideal for replacing existing models (including models of most competitors)
- Frequency controlled motor
- Power Wash® perforated lifting ribs: more mechanical action, lower water consumption


OPTIONS

- Full control (FC) microprocessor
- Coin operated timer
- Liquid soap pumps
- Soft wash version (wet cleaning)
- Anti-vandalism fascia panel
- Water recovery kit
- LPMS networking software

liqui-mix®

POWERWASH®

TYPE		FS 6	FS 7	FS 10
CAPACITY				
Drum volume	l	60	73	95
Capacity	kg	6	7,3	10
Drum dimensions	mm	∅ 530x270	∅ 530x330	∅ 530x420
DRUM SPEED				
Wash speed	rpm	42	42	42
Distribution speed	rpm	100	100	100
Spin speed	rpm	1000	1000	1000
G-factor		300	300	300
PROGRAMMER				
Coin meter (or tokens)		+	+	+
Coin counter		+	+	+
EC microprocessor		standard	standard	standard
FC microprocessor		+	+	+
Vandal Resistant Microprocessor		+	+	+
CABINET				
Stainless steel AISI 304		standard	standard	standard
Coloured panels		+	+	+
CONNECTION				
		Freestanding	Freestanding	Freestanding
HEATING				
100% hot water	°C	90	90	90
	°F	194	194	194
100% electrical 220-240V	kW	6-9	6-9-12	6-9-12
380-400V	kW	6-9	6-9-12	6-9-12
Hot water and electrical				
Additional heating 220-240V	kW	6-9	6-9-12	6-9-12
380-400V	kW	6-9	6-9-12	6-9-12
Steam additional heating	bar	1-3	1-3	1-3
Steam high pressure	bar	3-8	3-8	3-8
CONNECTION				
Electrical		1AC/220-240V/50-60Hz 3AC/220-240V/50-60Hz 3AC/380-415V+N/50-60Hz Others on request		
Water inlet	inch	3/4"		
Steam inlet	inch	1/2"		
DIMENSIONS				
HxWxD	mm	1070x660x770	1070x660x770	1130x660x865
TRANSPORT DATA				
Gross weight				
Cardboard packing	kg	240	250	300
Net weight	kg	230	235	275
Volume (packed)				
Cardboard packing	m ³	0,79	0,79	0,92
Cardboard packing HxWxD	mm	1250x750x850	1250x750x850	1300x750x950
+ = Available Standard = Standard execution				

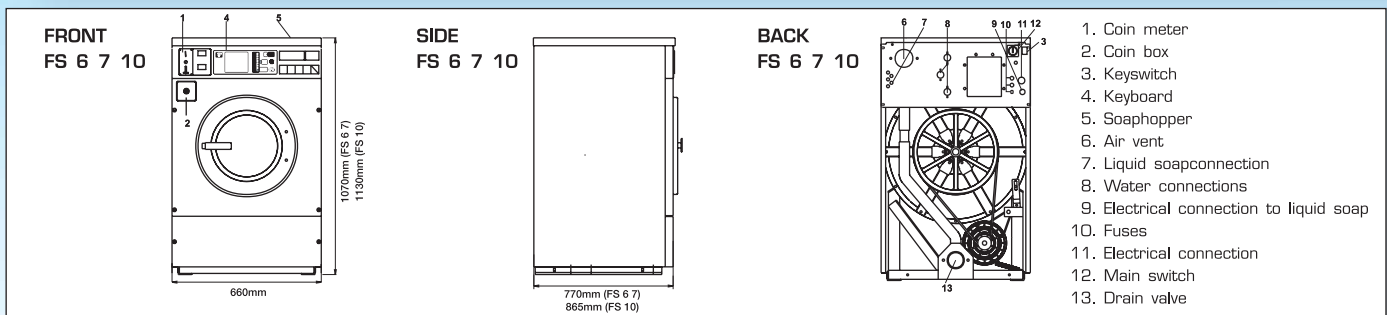

The company Primus bvba preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

primus

Quality without compromise

